

道路灯具系列 LD05 Road lighting series

产品特点 Material & Characteristic


- 灯具的灯体，面框及尾座为铝合金压铸而成，结构轻巧、牢固，表面防腐静电喷涂处理，持久耐用。
- 高纯铝阳极氧化反射器，反射效率高，内有空气净化呼吸器，确保光通量的高输出和降低反射系数的衰减。
- 耐高温，高透明钢化玻璃材料，透光性好，强度高。
- 内置硅橡胶密封圈，卓越的防尘防水性能，防护等级达到IP65，减低灯具维修率。
- 弹性扣紧器脱卸，一体化设计，使用电器部件安装于灯具内部，维护检修方便。
- 安装管径 Φ 48-60mm，安装高度：8-12m。
- Body, frame and backstay cast by aluminum alloy, light and solid construction, outside disposal with static electricity plastic-sprur, perdurable.
- High pressure aluminum positive pole reflection, air purity breath appliance inside, assure high exportation of luminous flux and lessen the declination of reflective coefficient
- Heat resisting, materials of high transparent toughened glass, good transparency, high intensity
- Inner silicon rubber airtight ring, perfect anti-dust and anti-water performance, protective class up to Ip65, lessens the repairing incidence of the lamps.
- Stretch buckle for discharging, united design, and inner fixed electric devices, convenient for repairing.
- fixing caliber φ 48-60mm, fixing height: 8-12m




应用范围 Applications

道路、收费站、高架桥、停车场、广场等场所。
road, bridge, square, dock, parking lot, city district ect.

产品尺寸 size

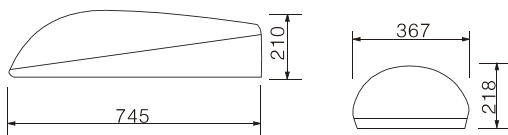

配光曲线 Luminous intensity cure



技术参数 Product Parameter

IP65

型号 Model	光源/灯功率 lamp	灯头 Base	电压/频率 Voltage & frequency
HQBN-250L/LD05	HPS 250W	E40	220V/50Hz
HQBN-400L/LD05	HPS 400W	E40	220V/50Hz